

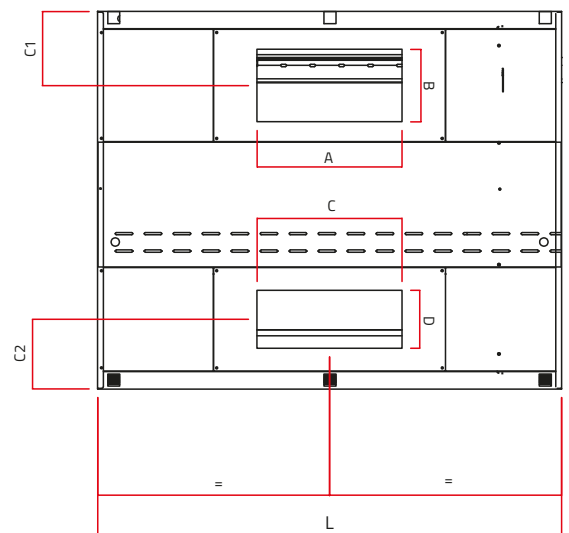


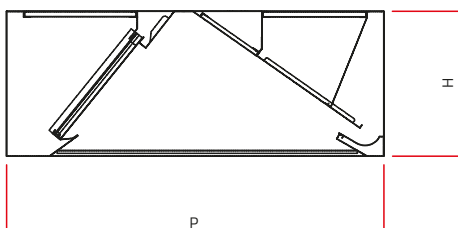

## CAPPA A COMPENSAZIONE A PARETE MOD. KPR Serie 110 / 130 / 150

**WALL COMPENSATION HOODS KPR LINE**

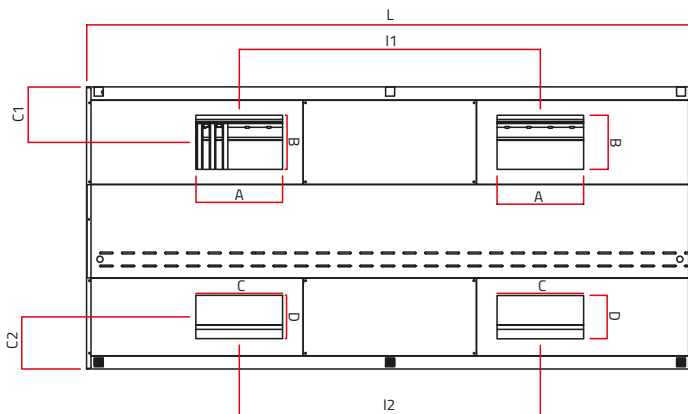

## LISTINO TECNICO Cappe a compensazione

### TECHNICAL PRICELIST Compensation hoods

#### Serie 110

Modelli Models	304 €	Dim. P x L x h mm	AxB mm	CxD mm	I1 mm	I2 mm	Filtri n° Filters n°	Peso Kg Weight Kg	Volume asp. MC/H*
KPR 11/12		1100x1200x500	400x250	400x200			2d	49	1900
KPR 11/14		1100x1400x500	400x250	400x200			3c	56	2200
KPR 11/16		1100x1600x500	500x250	500x200			3c	61	2550
KPR 11/18		1100x1800x500	500x250	500x200			3d	68	2850
KPR 11/20		1100x2000x500	600x250	600x200			4c	74	3200
KPR 11/22		1100x2200x500	600x250	600x200			4c	81	3500
KPR 11/24		1100x2400x500	700x250	700x200			4d	87	3800
KPR 11/26		1100x2600x500	700x250	700x200			4d	94	4120
KPR 11/28		1100x2800x500	400x250x2	400x200x2	1400	1400	5d	100	4440
KPR 11/30		1100x3000x500	400x250x2	400x200x2	1500	1500	5d	107	4750
KPR 11/32		1100x3200x500	500x250x2	500x200x2	1600	1600	5d	113	5070
KPR 11/34		1100x3400x500	600x250x2	600x200x2	1700	1700	6d	120	5390
KPR 11/36		1100x3600x500	600x250x2	600x200x2	1800	1800	6d	124	5700
KPR 11/38		1100x3800x500	600x250x2	600x200x2	1900	1900	6d	133	6020

#### CARATTERISTICHE COSTRUTTIVE:

La cappa a flusso compensato, attraverso l'immissione d'aria indirizzata verso i filtri, garantisce una ridotta depressione degli ambienti con conseguente riduzione dei costi di climatizzazione, migliorando la captazione dei fumi grazie all'effetto induttivo. Costruzione in acciaio inox AISI 304. Esecuzioni speciali su richiesta.

#### In dotazione:

- Filtri a labirinto
- Illuminazione con strip led integrate
- Scarico condensa 1/2"
- Lunghesse diverse = prezzo delle cappe con lunghesse immediatamente superiori (KPR 11/13 = KPR 11/14)

#### Note:

Per gli accessori vedi le pagine specifiche. Imballo pluriball con angolari in polistirolo compresi nel prezzo.

#### Serie 130

Modelli Models	304 €	Dim. P x L x h mm	AxB mm	CxD mm	I1 mm	I2 mm	Filtri n° Filters n°	Peso Kg Weight Kg	Volume asp. MC/H*
KPR 13/12		1300x1200x500	400x250	400x200			2d	54	2250
KPR 13/14		1300x1400x500	400x250	400x200			3c	61	2620
KPR 13/16		1300x1600x500	500x250	500x200			3c	69	3000
KPR 13/18		1300x1800x500	500x250	500x200			3d	77	3370
KPR 13/20		1300x2000x500	600x250	600x200			4c	84	3750
KPR 13/22		1300x2200x500	600x250	600x200			4c	91	4120
KPR 13/24		1300x2400x500	700x250	700x200			4d	98	4500
KPR 13/26		1300x2600x500	700x250	700x200			4d	105	4870
KPR 13/28		1300x2800x500	400x250x2	400x200x2	1400	1400	5d	112	5250
KPR 13/30		1300x3000x500	400x250x2	400x200x2	1500	1500	5d	120	5620
KPR 13/32		1300x3200x500	500x250x2	500x200x2	1600	1600	5d	128	5990
KPR 13/34		1300x3400x500	600x250x2	600x200x2	1700	1700	6d	136	6370
KPR 13/36		1300x3600x500	600x250x2	600x200x2	1800	1800	6d	144	6740
KPR 13/38		1300x3800x500	600x250x2	600x200x2	1900	1900	6d	152	7120

#### CONSTRUCTION CHARACTERISTICS:

The hood with compensated flow, through air input sent towards the filters, ensures a reduced negative pressure of the environment, with consequent reduction in air conditioning costs and improvement of fume extraction thanks to the inductive effect. Construction in stainless steel AISI 304. Special fabrication on request.

#### Supplied:

- Baffle filters
- Built-in strip led lights
- Condensate draining cock 1/2"
- Other lengths = price of hoods w/next lengths up (KPR 11/13 = KPR 11/14)

#### Notes:

For the accessories please see the relative pages. Bubble wrap packaging with polystyrene corners included.

#### Serie 150

Modelli Models	304 €	Dim. P x L x h mm	AxB mm	CxD mm	I1 mm	I2 mm	Filtri n° Filters n°	Peso Kg Weight Kg	Volume asp. MC/H*
KPR 15/12		1500x1200x500	400x250	400x200			2d	58	2600
KPR 15/14		1500x1400x500	400x250	400x200			3c	66	3030
KPR 15/16		1500x1600x500	500x250	500x200			3c	75	3460
KPR 15/18		1500x1800x500	500x250	500x200			3d	83	3890
KPR 15/20		1500x2000x500	600x250	600x200			4c	91	4320
KPR 15/22		1500x2200x500	600x250	600x200			4c	99	4750
KPR 15/24		1500x2400x500	700x250	700x200			4d	108	5200
KPR 15/26		1500x2600x500	700x250	700x200			4d	116	5620
KPR 15/28		1500x2800x500	400x250x2	400x200x2	1400	1400	5d	124	6050
KPR 15/30		1500x3000x500	400x250x2	400x200x2	1500	1500	5d	132	6480
KPR 15/32		1500x3200x500	500x250x2	500x200x2	1600	1600	5d	140	6910
KPR 15/34		1500x3400x500	600x250x2	600x200x2	1700	1700	6d	149	7350
KPR 15/36		1500x3600x500	600x250x2	600x200x2	1800	1800	6d	157	7780
KPR 15/38		1500x3800x500	600x250x2	600x200x2	1900	1900	6d	165	8210

Portata media definita con velocità di passaggio sottocappa 0,4 m/sec.

#### Filtri/filters :

a (400x400) - b (500x400)  
c (400x500) - d (500x500)