
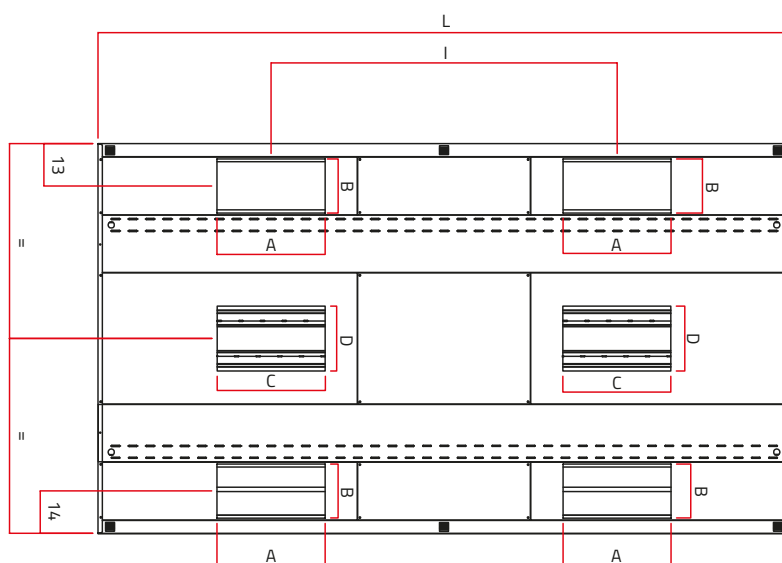


## CAPPA A COMPENSAZIONE MODULARE MOD. KCR-D

Serie 220 / 260 / 300

*WALL COMPENSATION HOODS KCRD LINE*

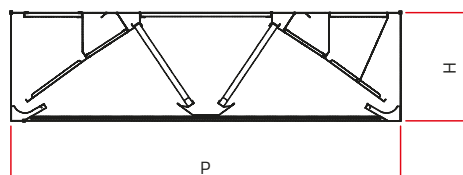

## LISTINO TECNICO Cappe a compensazione

TECHNICAL PRICELIST Compensation hoods

### Serie 220

Modelli Models	304 €	Dim. P x L x h mm	AxB mm	CxD mm	l1 mm	l2 mm	Filtri n° Filters n°	Peso Kg Weight Kg	Volume asp. MC/H*
KCR-D 22/24		2200x2400x500	400x250x2	400x300x2			8d	312	7630
KCR-D 22/26		2200x2600x500	400x250x2	400x300x2			8d	334	8240
KCR-D 22/28		2200x2800x500	400x250x2	400x300x2	1400	1400	10d	356	8890
KCR-D 22/30		2200x3000x500	400x250x2	400x300x2	1500	1500	10d	375	9500
KCR-D 22/32		2200x3200x500	500x250x2	500x300x2	1600	1600	10d	390	10150
KCR-D 22/34		2200x3400x500	500x250x2	500x300x2	1700	1700	12d	418	10800
KCR-D 22/36		2200x3600x500	600x250x2	600x300x2	1800	1800	12d	434	11400
KCR-D 22/38		2200x3800x500	600x250x2	600x300x2	1900	1900	12d	475	12000

#### CARATTERISTICHE COSTRUTTIVE:

La cappa a flusso compensato modulare, attraverso l'immissione d'aria indirizzata verso i filtri, garantisce una ridotta depressione degli ambienti con conseguente riduzione dei costi di climatizzazione, migliorando la captazione dei fumi grazie all'effetto induttivo. Costruzione in acciaio inox AISI 304. Esecuzioni speciali su richiesta.

#### In dotazione:

- Filtri a labirinto
- Illuminazione con strip led integrate
- Scarico condensa 1/2"
- Lunghezze diverse = prezzo delle cappe con lunghezze immediatamente superiori (KCR-D 22/25 = KCR-D 22/26)

#### Note:

Per gli accessori vedi le pagine specifiche. Imballo pluriball con angolari in polistirolo compresi nel prezzo.

### Serie 260

Modelli Models	304 €	Dim. P x L x h mm	AxB mm	CxD mm	l1 mm	l2 mm	Filtri n° Filters n°	Peso Kg Weight Kg	Volume asp. MC/H*
KCR-D 26/24		2600x2400x500	400x250x2	400x300x2			8d	314	9000
KCR-D 26/26		2600x2600x500	400x250x2	400x300x2			8d	358	9750
KCR-D 26/28		2600x2800x500	400x250x2	400x300x2	1400	1400	10d	400	10500
KCR-D 26/30		2600x3000x500	400x250x2	400x300x2	1500	1500	10d	422	11200
KCR-D 26/32		2600x3200x500	500x250x2	500x300x2	1600	1600	10d	444	11980
KCR-D 26/34		2600x3400x500	500x250x2	500x300x2	1700	1700	12d	468	12740
KCR-D 26/36		2600x3600x500	600x250x2	600x300x2	1800	1800	12d	472	13500
KCR-D 26/38		2600x3800x500	600x250x2	600x300x2	1900	1900	12d	498	14250

#### CONSTRUCTION CHARACTERISTICS:

The modular hood with compensated flow, through air input sent towards the filters, ensures a reduced negative pressure of the environment, with consequent reduction in air conditioning costs and improvement of fume extraction thanks to the inductive effect. Construction in stainless steel AISI 304. Special fabrication on request.

#### Supplied:

- Baffle filters
- Built-in strip led lights
- Condensate draining cock 1/2"
- Other lengths = price of hoods w/next lengths up (KCR-D 22/25 = KCR-D 22/26)

#### Notes:

For the accessories please see the relative pages. Bubble wrap packaging with polystyrene corners included.

### Serie 300

Modelli Models	304 €	Dim. P x L x h mm	AxB mm	CxD mm	l1 mm	l2 mm	Filtri n° Filters n°	Peso Kg Weight Kg	Volume MC/H*
KCR-D 30/24		3000x2400x500	400x250x2	400x300x2			8d	324	10350
KCR-D 30/26		3000x2600x500	400x250x2	400x300x2			8d	354	11200
KCR-D 30/28		3000x2800x500	400x250x2	400x300x2	1400	1400	10d	376	12090
KCR-D 30/30		3000x3000x500	400x250x2	400x300x2	1500	1500	10d	398	12960
KCR-D 30/32		3000x3200x500	500x250x2	500x300x2	1600	1600	10d	422	13800
KCR-D 30/34		3000x3400x500	500x250x2	500x300x2	1700	1700	12d	444	14680
KCR-D 30/36		3000x3600x500	600x250x2	600x300x2	1800	1800	12d	468	15550
KCR-D 30/38		3000x3800x500	600x250x2	600x300x2	1900	1900	12d	512	16400

Portata media definita con velocità di passaggio sottocappa 0,4 m/sec.

#### Filtri/filters :

a (400x400) - b (500x400)  
c (400x500) - d (500x500)