
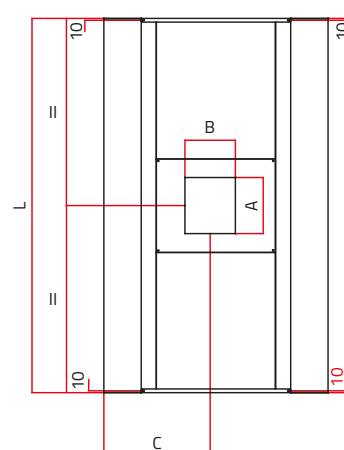
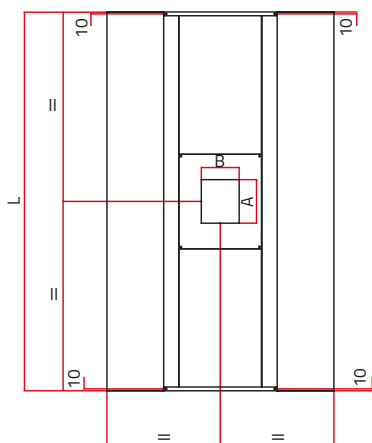



CAPPA CENTRALI CENTRO LOCALE CALANDRATA con o senza elettroventilatore Serie 120

ISLAND HOODS CALANDRATE WITH OR WITHOUT EXTRAFACTOR FANS

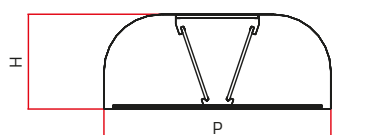

LISTINO TECNICO Cappe calandrate a parete centrale

TECHNICAL PRICELIST Calendered wall and island hoods

Neutra

Modelli Models	304 €	Dim. P x L x h mm	AxB mm	C mm	Filtri n° Filters n°	Peso Kg Weight Kg	Volume MC/H*	LED €
CCT 12/12		1200x1200x500	250x250	600	4b	40	1800	
CCT 12/14		1200x1400x500	250x250	600	4b	42	2100	
CCT 12/16		1200x1600x500	250x250	600	6a	44	2400	
CCT 12/18		1200x1800x500	300x300	600	6b	46	2700	
CCT 12/20		1200x2000x500	300x300	600	8a	48	3000	

CARATTERISTICHE COSTRUTTIVE:

Il particolare profilo la rende ideale per blocchi di cottura 70 posizionati a parete anche nel caso di cucine a vista. Costruzione in AISI 304. Esecuzioni speciali su richiesta.

In dotazione:

- Elettroventilatore centrifugo 220V monofase 50/60 Hz
- Filtri a labirinto
- Scarico condensa 1/2"
- Lunghezze diverse = prezzo delle cappe con lunghezze immediatamente superiori (CCTM 12/13 = CCTM 12/14)

Note:

Per gli accessori vedi le pagine specifiche. Imballo pluriball con angolari in polistirolo compresi nel prezzo.

Con elettroventilatore

Modelli Models	304 €	Dim. P x L x h mm	AxB mm	C mm	Filtri n° Filters n°	Peso Kg Weight Kg	Tipo E.V.	Watt/ Amp	LED €
CCTM 12/12		1200x1200x500	300x270	670	2b	60	8/9T	420/3,1	
CCTM 12/14		1200x1400x500	300x270	670	2b	64	8/9T	420/3,1	
CCTM 12/16		1200x1600x500	300x270	670	4a	68	8/9T	420/3,1	
CCTM 12/18		1200x1800x500	300x270	670	4b	69	8/9T	420/3,1	
CCTM 12/20		1200x2000x500	300x270	670	6a	70	8/9T	420/3,1	

CONSTRUCTION CHARACTERISTICS:

The particular profile makes it ideal for 70 cooking blocks positioned on the wall even in the case of open kitchens. Construction in AISI 304. Special fabrication on request.

Supplied:

- Electric centrifugal fan 220V single-phase 50/60 Hz
- Baffle filters
- Condensate draining cock 1/2"
- Other lengths = price of hoods w/next length up (CCTM 12/13 = CCTM 12/14)

Notes:

For the accessories please see the relative pages. Pluriball wrap packaging with polystyrene corners included.

Portata media definita con velocità di passaggio sottocappa 0,3 m/sec.

Filtri/filters :

a (400x400) - b (500x400)
c (400x500) - d (500x500)